



LOCKS FOR STEEL DOORS

Cylinder electric rim locks - ELETTRIKA	147
Booster, Booster plus, Coil set Bticino, microswitch device for ELETTRIKA rim locks	148
Cylinder electric rim locks	149
Cylinder rim locks for shutters	152
Cylinder mortice locks for gates	154
Cylinder mortice locks rolling-shutter and railings	157
Cylinder mortice locks for shutters	158
Cylinder mortice locks	159
Cylinder rim locks	162
Multithrow cylinder rim locks	164
Cylinder mortice locks	165
Double-bit key mortice locks	166
Double-bit key mortice locks	168
Accessories for metal locks	171
Dimensional drawings	179

**Technical features:**

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12 AC CE power supply
- Non-handed and with a variable backset from 50 to 80 mm

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1





On request:





- Booster device item 1.07022.00.0
- Booster plus device item 1.07022.10.0
- Coil set BTicino device item 1.07025.10.0
- Microswitch device item 1.07023.00.0

Hand:

0 = Non-handed


ELETTRIKA
 BELLA ROBUSTA AFFIDABILE

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Back plate for lock and striker to be welded	 Art. 1 0G150 00 0		50-80	2,800	1	1 1A721 00 0				
	• Back plate for lock and striker to be welded • Inner push-button • Hold open device	 Art. 1 0G150 00 0		50-80	2,800	1	1 1A731 00 0				

Type	Description	 Unit weight	 Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	- Booster Plus device may be combined with ElettriKa rim lock to have the following function: - Door condition signal - Electric hold open device - Tension adaptor for tension different from 12 V ac - Electrical input reduction Undersized power supply - Supplied as standard: - Pin to deactivate hold open catch - Fixing screws - Instructions sheet t - Please note: - Booster Plus device may be combined also with all electric locks (electric striker excluded)	0,060	6	1	07022	00	0	
	- Booster Plus device may be combined with ElettriKa rim lock to have the following function: - Electronic opening timer with 5 different options (120 sec default) - Door condition signal - Electric hold open device - Tension adaptor for tension different from 12 V ac - Electrical input reduction - Undersized power supply - Supplied as standard: - Pin to deactivate hold open catch - Fixing screws - Instructions sheet	0,185	1	1	07022	10	0	
	- Coil for Bticino intercommunication system audio swing ref. 344702-03-04 - Video intercommunication system video swing ref. 344902-03-04 combined with elettriKa rim lock give door control signal - Supplied as standard: - Fixing screws - Instructions sheet	0,092	1	1	07025	10	0	
	- Microswitch - Give a signal to operate ration motor may be installed directly on the elettriKa rim lock - Supplied as standard: - instruction sheet	0,007	6	1	07023	00	0	






**Technical features:**











- Zinc-plated steel case and striker
- Dead-locking latch
- 12 V ac CE
















Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 3 keys item 1.01310.00.1

Hand:1 = R.H.
inwards 2 = L.H.
inwards 3 = R.H.
outwards 4 = L.H.
outwards 

Type	Description	Cylinder	Throws	Backset	Unit weight 	 Pieces	ITEM			
							Type	Dim.	Hand	Fin. Pers. Spec.
	• Protective back plate • Spacer	 1 02139 00 0	-	40	2,158	1	1 11521	40	1	
			-	40	2,165	1	1 11521	40	2	
	• Protective back plate • Spacer • Push-button • Hold-open device	 1 02110 00 0	-	40	2,152	1	1 11551	40	1	
			-	40	2,140	1	1 11551	40	2	
	• Protective back plate • Spacer	 1 02139 00 0	-	50	2,090	1	1 11721	50	1	
			-	50	2,095	1	1 11721	50	2	
			-	60	2,091	1	1 11721	60	1	
			-	60	2,085	1	1 11721	60	2	
			-	70	2,090	1	1 11721	70	1	
			-	70	2,090	1	1 11721	70	2	
			-	80	2,090	1	1 11721	80	1	
			-	80	2,060	1	1 11721	80	2	
	• Protective back plate • Spacer • Push-button • Hold-open device	 1 02110 00 0	-	50	2,100	1	1 11731	50	1	
			-	50	2,103	1	1 11731	50	2	
			-	60	2,085	1	1 11731	60	1	
			-	60	2,100	1	1 11731	60	2	
			-	70	2,100	1	1 11731	70	1	
			-	70	2,100	1	1 11731	70	2	
			-	80	2,100	1	1 11731	80	1	
			-	80	2,085	1	1 11731	80	2	

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim.	Hand	Pers. Spec.
 • Manual throw dead-bolt • Protective back plate • Spacer	 1 02145 00 0	2 50	2,220	1	1 11761 50 1					
		2 50	2,218	1	1 11761 50 2					
		2 60	2,216	1	1 11761 60 1					
		2 60	2,210	1	1 11761 60 2					
		2 70	2,200	1	1 11761 70 1					
		2 70	2,222	1	1 11761 70 2					
		2 80	2,230	1	1 11761 80 1					
		2 80	2,250	1	1 11761 80 2					
 • Manual throw dead-bolt • Protective back plate • Spacer • Push-button	 1 02145 00 0	2 50	2,205	1	1 11771 50 1					
		2 50	2,205	1	1 11771 50 2					
		2 60	2,200	1	1 11771 60 1					
		2 60	2,220	1	1 11771 60 2					
		2 70	2,210	1	1 11771 70 1					
		2 70	2,210	1	1 11771 70 2					
		2 80	2,231	1	1 11771 80 1					
		2 80	2,251	1	1 11771 80 2					
 • For automated and up-and-over gates • Protective back plate	 1 02142 00 0	- 80	2,100	1	1 11823 80 1					
		- 80	2,100	1	1 11823 80 2					
 • For automated and up-and-over gates • Protective back plate	 1 02139 00 0	- 50	1,480	1	1 11921 50 1					
		- 50	1,477	1	1 11921 50 2					
		- 60	1,479	1	1 11921 60 1					
		- 60	1,472	1	1 11921 60 2					
		- 70	1,472	1	1 11921 70 1					
		- 70	1,476	1	1 11921 70 2					
		- 80	1,470	1	1 11921 80 1					
		- 80	1,475	1	1 11921 80 2					
 • Push-button • Hold-open device	 1 02110 00 0	- 50	1,475	1	1 11931 50 1					
		- 50	1,475	1	1 11931 50 2					
		- 60	1,470	1	1 11931 60 1					
		- 60	1,472	1	1 11931 60 2					
		- 70	1,475	1	1 11931 70 1					
		- 70	1,478	1	1 11931 70 2					
		- 80	1,470	1	1 11931 80 1					
		- 80	1,472	1	1 11931 80 2					

Type	Description	Cylinder	Throws	Backset	Kg Unit weight	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
 • WITH SIGNAL LIGHTS • Protective back plate • Spacer			-	50	2,098	1	1 11726	50	1		
			-	50	2,106	1	1 11726	50	2		
			-	60	2,140	1	1 11726	60	1		
			-	60	2,140	1	1 11726	60	2		
			-	70	2,119	1	1 11726	70	1		
			-	70	2,142	1	1 11726	70	2		
			-	80	2,127	1	1 11726	80	1		
			-	80	2,143	1	1 11726	80	2		
 • WITH SIGNAL LIGHTS • Protective back plate • Spacer • Push-button • Hold-open device			-	50	2,147	1	1 11736	50	1		
			-	50	2,142	1	1 11736	50	2		
			-	60	2,144	1	1 11736	60	1		
			-	60	2,134	1	1 11736	60	2		
			-	70	2,130	1	1 11736	70	1		
			-	70	2,154	1	1 11736	70	2		
			-	80	2,140	1	1 11736	80	1		
			-	80	2,147	1	1 11736	80	2		
 • FOR OUTWARD OPENING GATES			-	50	1,539	1	1 11921	50	3		
			-	50	1,538	1	1 11921	50	4		
			-	60	1,534	1	1 11921	60	3		
			-	60	1,534	1	1 11921	60	4		
			-	70	1,533	1	1 11921	70	3		
			-	70	1,538	1	1 11921	70	4		
			-	80	1,539	1	1 11921	80	3		
			-	80	1,534	1	1 11921	80	4		
 • FOR OUTWARD OPENING GATES • Push-button • Hold-open device			-	50	1,536	1	1 11931	50	3		
			-	50	1,530	1	1 11931	50	4		
			-	60	1,532	1	1 11931	60	3		
			-	60	1,532	1	1 11931	60	4		
			-	70	1,530	1	1 11931	70	3		
			-	70	1,534	1	1 11931	70	4		
			-	80	1,532	1	1 11931	80	3		
			-	80	1,532	1	1 11931	80	4		
 • FOR OUTWARD OPENING GATES WITH SIGNAL LIGHTS • Push-button • Hold-open device			-	50	1,571	1	1 11936	50	3		
			-	50	1,572	1	1 11936	50	4		
			-	60	1,566	1	1 11936	60	3		
			-	60	1,569	1	1 11936	60	4		
			-	70	1,580	1	1 11936	70	3		
			-	70	1,573	1	1 11936	70	4		
			-	80	1,575	1	1 11936	80	3		
			-	80	1,577	1	1 11936	80	4		

**Technical features:**

- Zinc-plated steel case
- Steel dead-bolts
- Steel dead-bolts, 25 mm throws

• ITEMS 41510 - 41525 - 41526:





- 2 keys item 1.01060.10.0







Hand:

- 0 = Non-handed
- 1 = R.H.
- 2 = L.H

Supplied as standard:

- 3 keys
- ITEMS 41010 - 41110 - 41111:
 - inside: 1 key item 1.01310.00.2
 - outside: 2 keys item 1.01330.00.1
- ITEMS 41210 - 41220 - 41221 - 41230 - 41231 - 41310 - 41311 - 41320:
 - inside: 1 key item 1.01310.00.2
 - outside: 2 keys item 1.01320.00.1
- ITEMS 41410 - 41420 - 41421:
 - inside: 1 key item 1.01320.00.2
 - outside: 2 keys item 1.01330.00.1

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight Kg	Pieces	ITEM				
											Type	Dim.	Hand	Fin.	Pers. Spec.
	• Central application	1 02544 14 0	160	55	11,5	13,0	2	80	0,508	2	1	41010	80	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,551	2	1	41210	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,540	2	1	41320	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,518	2	1	41410	78	0	
	• Lateral application	1 02544 14 0	155	55	11,5	15,0	2	78	0,420	12	1	41110	60	1	
		1 02544 14 0	120	55	11,5	13,0	2	60	0,424	2	1	41110	60	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	2	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	1	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	2	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,490	2	1	41420	78	1	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,498	2	1	41420	78	2	
	• Pair of locks with lateral application (1 pc.rh, 1 pc.lh)	1 02544 14 0	120	55	11,5	13,0	2	60	0,848	2	1	41110	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1	41220	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1	41230	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1	41310	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,996	2	1	41420	78	0	
	• Pair of locks with lateral application (1 pc.rh, 1 pc.lh)	1 02544 14 0	120	55	11,5	13,0	2	60	0,800	2	1	41111	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1	41221	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1	41231	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1	41311	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,940	2	1	41421	78	0	

Type	Description	Cylinder								ITEM					
			L	A	B	S	Throws	Backset	Unit weight 	Pieces 	Type	Dim. Hand	Fin.	Pers. Spec.	
 	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,495	12	1	41510 78 0			
	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,518	12	1	41510 78 0 00 TC			
	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,518	12	1	41510 78 0 00 ZQ			
 	• Lateral application • Bent deadbolt • 1 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,445	12	1	41525 78 1			
			155	55	5,5	15,0	2	78	0,490	12	1	41525 78 2			
 	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,490	6	1	41525 78 0			
	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,875	6	1	41526 78 0			
	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,940	6	1	41526 78 0 00 TC			

**Technical features:**

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Steel dead-bolt

Supplied as standard:






- Cylinder fixing screws (for versions with European profile cylinders)








Hand:








0 = Non-handed

1 = R.H.
inwards ☐2 = L.H.
inwards ☐
**Cylinder to
be ordered
separately**

 Use only
 OG300 OE300
 cylinders series

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch with built-in dead-bolt • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	-	22	50	0,789	2	1	42010	50	0	
	• Latch with built-in dead-bolt	1	-	22	50	0,609	2	1	42011	50	0	
	• Dead-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	-	22	50	0,735	2	1	42020	50	0	
	• Dead-bolt only	2	-	22	50	0,550	2	1	42021	50	0	
	• Latch with built-in dead-bolt • Inside knob • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	-	22	50	0,804	2	1	42030	50	1	
		1	-	22	50	0,804	2	1	42030	50	2	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch with built-in dead-bolt • Inside knob	1	-	22	50	0,607	2	1 42031 50 1				
		1	-	22	50	0,607	2	1 42031 50 2				
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	-	-	22	30	0,657	2	1 42110 30 0				
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	-	-	22	30	0,470	2	1 42111 30 0				
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	-	22	30	0,620	2	1 42120 30 0				
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	-	22	30	0,425	2	1 42121 30 0				
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	-	42	22	30	0,713	2	1 42210 30 0				
	• Latch with dead-locking device • Through spindle	-	42	22	30	0,520	2	1 42211 30 0				
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	42	22	50	0,832	2	1 42310 50 0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch with dead-locking device • Through spindle	1	42	22	50	0,650	2	1 42311 50 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	57	22	30	0,853	2	1 42410 30 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	1	57	22	30	0,671	2	1 42411 30 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	30	0,724	2	1 42420 30 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	30	0,538	2	1 42421 30 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	50	1,018	2	1 42510 50 0				
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	50	0,825	2	1 42511 50 0				

**Technical features:**

- Steel case
- Steel faceplate
- Lamellar steel deadbolt protected by single throw armour plating
- 13 mm driving gears stroke for additional locking points
- Spindle for operating the dead bolt and driving gears
- Dead bolt resistance according to Class 3, CEN standard, prEN 12209: 2002 Security sections 5.8.2.1 and 5.8.6.
- Resistance to lateral load (up to 1000 kg) in conformity with the highest levels indicated by the relevant standards.

Finishes:

- Zinc-plated case
- Zinc-plated faceplate
- Zinc-plated deadbolt


Hand:

0 = Non-handed

Cylinder to be ordered separately


 0G303, 0G305,
 0E303, 0E305

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Latch bolt only
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
- European profile cylinders with special cam:
 - Item 1-0G305-02-0-12 (C2000 single cylinder)
 - Item 1-0G303-07-0-12 (C2000 double cylinder)
 - Item 1-0E305-02-0-12 (ASIX single cylinder)
 - Item 1-0E303-07-0-12 (ASIX double cylinder)
- Handle art. 1-06003-00-0
- Handle with edge cover art. 1-06004-00-0
- Striking plate art. 1-06232-21-0
- Adjustable striking plate art. 1-06232-22-0
- Screwed extended bolts art. 1-07088-03-0

1	59	25	19,7	0,590	24	1	46305	19	0
1	59	25	25,7	0,685	24	1	46305	25	0
1	59	25	31,7	0,780	24	1	46305	30	0



- Dead bolt only
- Pin key cylinder complete with 2 pieces item 1.00210.00.0 (KA 1 version, key included)
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
 - Handle item 1.06003.01.0
 - Handle with edge cover item 1.06004.01.0
 - Striker item 1.06232.21.0
 - Adjustable striker item 1.06232.22-0
 - Extended bolts item 1.07088.03.0

1	59	25	19,7	0,709	24	1	46307	19	0
1	59	25	25,7	0,804	24	1	46307	25	0
1	59	25	31,7	0,923	24	1	46307	30	0

**Technical features:**

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Pre-arranged for additional locking points

Hand:



0 = Non-handed

Operation:

- The handle operates both the swinging dead-bolt and the extended bolts, bringing them in the locking position; the key blocks the handle

Cylinder to be ordered separately**Supplied as standard:**

- Pair of threaded bushings (M8) item 1.06290.10.0
- Cylinder fixing screws
- Instruction sheet

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Nickel-plated dead-bolt • Inside steel rose item 1.06092.00.0 • ON REQUEST: - Extended bolts item 1.07088.03.0 - Cylinder with pin key item 1.02400.10.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.21.0	1	85	25	25	0,590	12	1	46300	25	0	
		1	85	25	30	0,620	12	1	46300	30	0	
		1	85	25	35	0,625	12	1	46300	35	0	
	• Nickel-plated dead-bolt • Inside steel rose item 1.06092.00.0 • ON REQUEST: - Extended bolts item 1.07088.03.0 - Cylinder with pin key item 1.02400.10.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.21.0	1	85	25	25	0,720	12	1	46302	25	0	
		1	85	25	30	0,750	12	1	46302	30	0	
		1	85	25	35	0,780	12	1	46302	35	0	
	• Nickel-plated hook • Inside steel rose item 1.06092.00.0 • Zinc plated steel striker item 1.06232.21.0 • ON REQUEST: - Extended bolts item 1.07088.03.0 - Cylinder with pin key item 1.02400.10.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0	1	85	25	25	0,580	12	1	46365	25	0	
		1	85	25	30	0,600	12	1	46365	30	0	
		1	85	25	35	0,702	12	1	46365	35	0	
	• Without frontal locking • Inside steel rose item 1.06092.00.0 • ON REQUEST: - Extended bolts item 1.07088.03.0 - Cylinder with pin key item 1.02400.10.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0	-	85	25	25	0,540	12	1	46375	25	0	
		-	85	25	30	0,560	12	1	46375	30	0	
		-	85	25	35	0,625	12	1	46375	35	0	

**Technical features:**

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Nickel-plated dead-bolt

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet




On request:





- Zinc-plated steel striking plate item 1.06232.21.0










Hand:

0 = Non-handed

Cylinder to be ordered separately


Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Per. Spec.
	• Dead-bolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of steel roses item 1.06092.00.0 • 12 V ac CE • ON REQUEST: - Striker item 1.06232.20.0	1	85	25	25	0,787	12	1	16315	25	0
		1	85	25	30	0,851	12	1	16315	30	0
		1	85	25	35	0,880	12	1	16315	35	0
	• Dead-bolt and latch • 10.5 to 16.5 mm. adjustable latch and piston • Set of steel roses item 1.06092.00.0 • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded pivots for fixing extended bolts • 12 V ac CE • ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Striker item 1.06232.20.0	1	85	25	25	0,901	12	1	16325	25	0
		1	85	25	30	0,937	12	1	16325	30	0
		1	85	25	35	0,985	12	1	16325	35	0
	• Dead-bolt only • Steel roses item 1.06092.00.0 • ON REQUEST: - Striker item 1.06232.21.0	1	-	25	25	0,505	12	1	46310	25	0
		1	-	25	30	0,521	12	1	46310	30	0
		1	-	25	35	0,780	12	1	46310	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-bolt only	1	-	25	25	0,667	12	1	46312	25	0	
	• Cross-key cylinder with 3 keys	1	-	25	30	0,687	12	1	46312	30	0	
	• Set of nylon roses item 1.06002.00.0	1	-	25	35	0,707	12	1	46312	35	0	
	• ON REQUEST: - Striker item 1.06232.21.0											
	• Dead-bolt and latch	1	85	25	25	0,820	12	1	46315	25	0	
	• Set of steel roses item 1.06092.00.0	1	85	25	30	0,840	12	1	46315	30	0	
	• ON REQUEST: - Striker item 1.06232.20.0	1	85	25	35	0,680	12	1	46315	35	0	
	• Dead-bolt and latch	1	85	25	25	0,747	12	1	46317	25	0	
	• Cross-key cylinder with 3 keys	1	85	25	30	0,767	12	1	46317	30	0	
	• Set of nylon roses item 1.06002.00.0	1	85	25	35	0,787	12	1	46317	35	0	
	• ON REQUEST: - Striker item 1.06232.20.0											
	• Dead-bolt only	1	-	25	25	0,618	12	1	46320	25	0	
	• Steel rose item 1.06092.00.0	1	-	25	30	0,673	12	1	46320	30	0	
	• Pre-arranged for additional locking points	1	-	25	35	0,630	12	1	46320	35	0	
	• Pair of threaded bushings (M8) item 1.06290.05.0											
	• Threaded pivots for fixing extended bolts ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Striker item 1.06232.21.0											

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Pers. Spec.
	• Dead-bolt only	1	-	25	25	0,687	12	1	46322	25	0
	• Cross-key cylinder with 3 keys	1	-	25	30	0,707	12	1	46322	30	0
	• Set of nylon rose item 1.06092.00.0	1	-	25	35	0,727	12	1	46322	35	0
	• Pre-arranged for additional locking points										
	• Pair of threaded bushings (M8) item 1.06290.05.0										
	• Threaded pivots for fixing extended bolts										
	• ON REQUEST:										
	- Extended bolts item 1.06415.00.0										
	- Extended bolts item 1.07088.03.0										
	- Floor striker item 1.06086.00.0										
	- Floor striker with dust cover item 1.06086.02.0										
	- Striker item 1.06232.21.0										
	• Dead-bolt and latch	1	85	25	25	0,682	12	1	46325	25	0
	• Pre-arranged for additional locking points	1	85	25	30	0,750	12	1	46325	30	0
	• Set of steel rose item 1.06092.00.0	1	85	25	35	0,758	12	1	46325	35	0
	• Pair of threaded bushings (M8) item 1.06290.05.0										
	• Threaded pivots for fixing extended bolts										
	• ON REQUEST:										
	- Extended bolts item 1.06415.00.0										
	- Extended bolts item 1.07088.03.0										
	- Floor striker item 1.06086.00.0										
	- Floor striker with dust cover item 1.06086.02.0										
	- Striker item 1.06232.20.0										
	• Dead-bolt and latch	1	85	25	25	0,797	12	1	46327	25	0
	• Cross-key cylinder with 3 keys	1	85	25	30	0,817	12	1	46327	30	0
	• Pre-arranged for additional locking points	1	85	25	35	0,837	12	1	46327	35	0
	• Set of nylon rose item 1.06092.00.0										
	• Pair of threaded bushings (M8) item 1.06290.05.0										
	• Threaded pivots for fixing extended bolts										
	• ON REQUEST:										
	- Extended bolts item 1.06415.00.0										
	- Extended bolts item 1.07088.03.0										
	- Floor striker item 1.06086.00.0										
	- Floor striker with dust cover item 1.06086.02.0										
	- Striker item 1.06232.20.0										

**Technical features:**

- Zinc-plated steel case and striker
- Brass latch and dead-bolt
- Brass draw-back pull and knob

Supplied as standard:






- Striker
- Fixing screws
- 3 keys item 1.01310.00.1






On request:

- Protective back plate and striker spacer item 1.07061.10.0

Hand:
 1 = R.H.
 inwards ☐

 2 = L.H.
 inwards ☐

Type	Description	Cylinder	Throws	Backset	Unit weight 	Pieces 	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• With fixing tongue • Inside knob and draw-back pull	 1 02552 50 0	2	60	1,050	1	1 50411	60	1		
			2	60	1,050	1	1 50411	60	2		
			2	70	1,120	1	1 50411	70	1		
			2	70	1,120	1	1 50411	70	2		
	• With fixing tongue • Inside draw-back pull	 1 02106 00 0	2	60	1,050	1	1 50421	60	1		
			2	60	1,050	1	1 50421	60	2		
			2	70	1,120	1	1 50421	70	1		
			2	70	1,120	1	1 50421	70	2		
	• With fixing tongue • Inside draw-back pull	 1 02106 00 0	2	50	0,965	1	1 50461	50	1		
			2	50	0,975	1	1 50461	50	2		
	• With fixing tongue • Through spindle	 1 02106 00 0	2	60	1,150	1	1 50471	60	1		
			2	60	1,170	1	1 50471	60	2		
	• With fixing tongue • Inside knob • Through spindle	 1 02552 50 0	2	60	1,150	1	1 50481	60	1		
			2	60	1,160	1	1 50481	60	2		

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim.	Hand	Pers. Spec.
	• Without fixing tongue • Inside knob and draw-back pull	 1 02552 50 0	2	60	1,020	1	1 50511 60 1			
			2	60	1,020	1	1 50511 60 2			
			2	70	1,090	1	1 50511 70 1			
			2	70	1,090	1	1 50511 70 2			
	• Without fixing tongue • Inside draw-back pull	 1 02106 00 0	2	60	1,010	1	1 50521 60 1			
			2	60	1,040	1	1 50521 60 2			
			2	70	1,080	1	1 50521 70 1			
			2	70	1,080	1	1 50521 70 2			
	• Without fixing tongue • Inside draw-back pull	 1 02106 00 0	2	50	0,950	1	1 50561 50 1			
			2	50	0,955	1	1 50561 50 2			
	• Without fixing tongue • Through spindle	 1 02106 00 0	2	60	1,110	1	1 50571 60 1			
			2	60	1,120	1	1 50571 60 2			
	• Without fixing tongue • Inside knob • Through spindle	 1 02552 50 0	2	60	1,130	1	1 50581 60 1			
			2	60	1,120	1	1 50581 60 2			



Technical features:

- Zinc-plated steel case, striker and plate
- Belt sanded zinc plated steel dead-bolt
- Nickel-plated steel knobs

Supplied as standard:







- 3 keys item 1.01310.00.1

On request:

- Striker item 1.07037.01.0

Hand:

1 = R.H.
inwards ☐

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Inside knob • Dead-bolt only		6	55	1,112	12	1	55254	55	1	
	• Dead-bolt only		6	55	1,150	12	1	55264	55	1	
	• Inside knob • Dead-bolt with built-in latch		6	55	1,080	12	1	55274	55	1	
	• Dead-bolt with built-in latch		6	55	1,150	12	1	55284	55	1	

**Technical features:**

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Pre-arranged for protective roses

Supplied as standard:

- Inside steel escutcheon item 1.06075.00.0
- Cylinder fixing screws
- Instruction sheet

On request:

- Zinc-plated, steel striking plate item 1.06232.00.0


Hand:

0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Case height 82 mm.

3	-	25	52	0,600	12	1 56013 50 0
3	-	25	60	0,635	12	1 56013 60 0
3	-	25	70	0,675	12	1 56013 70 0



- Case height 82 mm.
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.10.0
- ON REQUEST:
 - Extended bolts item 1.06415.00.0
 - Extended bolts item 1.07088.03.0
 - Floor striker item 1.06086.00.0
 - Floor striker with dust cover item 1.06086.02.0

3	-	25	60	0,731	12	1 56016 60 0
3	-	25	70	0,770	12	1 56016 70 0

**Technical features:**

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt

Supplied as standard:




- Inside steel escutcheon item 1.06124.02.0
- Instruction sheet






On request:

- Zinc-plated steel striking plate item 1.06232.00.0

Hand:

0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
									Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Case height 82 mm. • 2 keys	 1 00100 00 1	4	-	25	52	0,788	12	1	57013	50	0	00	30
			4	-	25	60	0,833	12	1	57013	60	0	00	30
			4	-	25	70	0,868	12	1	57013	70	0	00	30
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	-	25	52	0,760	12	1	57013	52	0	00	30
			4	-	25	60	0,812	12	1	57013	62	0	00	30
			4	-	25	70	0,833	12	1	57013	72	0	00	30
	• Case height 82 mm. • 2 keys • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	-	25	60	0,940	12	1	57016	60	0		
			4	-	25	70	0,982	12	1	57016	70	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	-	25	60	0,925	12	1	57016	62	0		
			4	-	25	70	0,963	12	1	57016	72	0		
	• Case height 82 mm. • 2 keysDead-bolt with 3 locking points	 1 00100 00 1	4	-	25	60	0,754	12	1	57030	60	0		
			4	-	25	70	0,780	12	1	57030	70	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	-	25	60	0,735	12	1	57030	62	0		
			4	-	25	70	0,773	12	1	57030	72	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 82 mm. • 2 keys • Dead-bolt with 3 locking points • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	-	25	60	0,848	12	1 57035 60 0				
			4	-	25	70	0,919	12	1 57035 70 0				
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	-	25	60	0,838	12	1 57035 62 0				
			4	-	25	70	0,870	12	1 57035 72 0				
	• Case height 93 mm. • 2 keys	 1 00100 00 1	2	-	22	40	0,520	12	1 57223 40 0				
			2	-	22	45	0,540	12	1 57223 45 0				
			2	-	22	50	0,560	12	1 57223 50 0				
			2	-	22	60	0,592	12	1 57223 60 0				
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	2	-	22	40	0,506	12	1 57223 42 0				
			2	-	22	45	0,524	12	1 57223 47 0				
			2	-	22	50	0,545	12	1 57223 52 0				
			2	-	22	60	0,578	12	1 57223 62 0				
	• Case height 93 mm. • 2 keys • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	2	-	25	45	0,670	12	1 57226 45 0				
			2	-	25	50	0,687	12	1 57226 50 0				
			2	-	25	60	0,730	12	1 57226 60 0				
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	2	-	25	45	0,657	12	1 57226 47 0				
			2	-	25	50	0,664	12	1 57226 52 0				
			2	-	25	60	0,708	12	1 57226 62 0				



Technical features:



- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Picking resistant protection plate (series 57333, 57336 excluded)
- Nickel-plated latch or reversible latch/bolt
- Electrical and mechanical versions are interchangeable





Supplied as standard:



- Instruction sheet





Hand:







0 = Non-handed








Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • 12 V ac CE • ON REQUEST: - Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,220	12	1	17353	90	0	
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing extended bolts • 12 V ac CE • ON REQUEST: - Extended bolts item 1.06441.15.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,312	12	1	17358	90	0	










Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	- Case height 82 mm. 2 keys - Dead-bolt and latch - Inside steel rose item 1.06124.02.0 - ON REQUEST: Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,040	12	1 57313 73 0				
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	4	67	25	70	1,016	12	1 57313 72 0				
	- Case height 82 mm. 2 keys - Dead-bolt and latch - Inside steel rose item .06124.02.0 - Pre-arranged for additional locking points - Pair of threaded bushings (M8) item 1.06290.05.0 - ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,100	12	1 57318 73 0				
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	4	67	25	70	1,100	12	1 57318 72 0				
	- Case height 82 mm. 2 keys - Dead-bolt only - Inside steel rose item 1.06124.02.0 - ON REQUEST: Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	-	25	70	0,850	12	1 57333 70 0				
	- Case height 82 mm. 2 keys - Dead-bolt only - Inside steel rose item 1.06124.02.0 - Pre-arranged for extended bolts - Pair of threaded bushings (M8) item 1.06290.10.0 - ON REQUEST: - Extended bolts item 1.06415.00.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	-	25	70	0,990	12	1 57336 70 0				

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch bolt • Inside steel rose item 1.06124.02.0 • ON REQUEST: - Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,100	12	1	57353	90	0	
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch • Inside steel rose item 1.06124.02.0 • Pre-arranged for extended bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extended bolts • ON REQUEST: - Extended bolts item 1.06441.15.0 - Extended bolts item 1.07088.03.0 - Floor striker item 1.06086.00.0 - Floor striker with dust cover item 1.06086.02.0 - Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	90	0	
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	92	0	






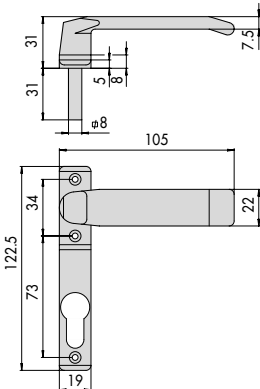
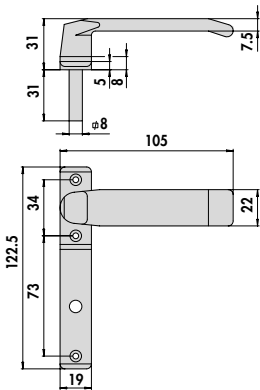
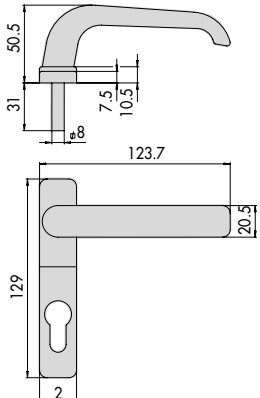
Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Per. Spec.
	Black nylon rose	02400	0,001	100	1	06002	00	0
	- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks 3 fastening screws	46305	0,100	12	1	06003	00	0
	- Handle, in 20 % fiber glass reinforced black nylon, for use with locks series 46305 3 fixing screws		0,100	12	1	06003	01	0
	- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks 3 fastening screws	46305	0,112	12	1	06004	00	0








Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Handle and edge cover in 20 % fiber glass reinforced black nylon, for use with locks series 46305 • 3 fixing screws		0,120	12	1	06004	01	0	
	• Lock shutter accessory		0,100	12	1	06005	00	0	
	• Zinc plated steel rose	42011, 42021, 42031, 42111, 42121, 42211, 42311, 42411, 42421, 42511, 56013, 56016	0,020	100	1	06075	00	0	
	• Brass floor striker diameter 11 mm. • FOR: - extended bolts with rods diameter 10 mm.		0,016	12	1	06086	00	0	
	• Brass floor striker, diameter 9 mm. • USED FOR: - Internal extended bolts with 8 mm. diameter rods		0,013	12	1	06086	01	0	
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: - Internal extended bolts with 8 mm. diameter rods multi-point locks series 46445 - Extended bolt for Multitop item 1.06449.11.0		0,020	12	1	06086	02	0	







Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Pers. Spec.
	• Zinc plated steel rose	42011, 42021, 42031, 42111, 42121, 42211, 42311, 42411, 42421, 42511, 46300, 46310, 46320, 46365, 46375	0,014	100	1	06092 00 0		
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,043	12	1	06124 00 0		
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,020	12	1	06124 02 0		
	• Noise proof bushes for bolts - diameter 8.5 mm. (2 pieces) - diameter 10 mm. (1 piece)	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1	06147 00 0		
	• Zinc plated steel striker	17353, 17358, 56013, 56016, 57013, 57016, 57030, 57035, 57223, 57226, 57333, 57336	0,055	25	1	06232 00 0		
	• Zinc plated steel striker	57313, 57318, 57353, 57358, 57378	0,056	25	1	06232 01 0		
	• Zinc-plated steel faceplate	46215, 46217, 46225, 46227	0,069	25	1	06232 20 0		



Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated steel striker	46300, 46302, 46305, 46310, 46312, 46320, 46322, 46365	0,056	25	1	06232	21	0	
	• Adjustable zinc-plated steel striker • 2 fastening screws	46305	0,050	25	1	06232	22	0	
	• Set of threaded bushes (M8) in metal	1 06441 20 0, 17358, 46320, 46322, 57358, 57378	0,050	12	1	06290	05	0	
	• Pair of threaded steel bushings (M8), anti-unscrewing	46300, 46302, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336	0,025	25	1	06290	10	0	
	• Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15	1 06415 00 0, 1 06416 00 0, 1 06441 15 0	0,056	12	1	06291	00	0	
	• Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0	0,054	12	1	06291	05	0	
	• Zinc plated hardened steel tip, dia. 14 mm	1 07088 05 0	0,038	12	1	06291	07	0	
	• Zinc plated steel pin connector	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0	0,016	12	1	06291	20	0	
	• Plate complete with 2 M5 fixing screws for rolling shutters series 41510, 41525, 41526	41510, 41525, 41526	0,014	50	1	06316	00	0	

175


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated roller striker	11761, 11771	0,198	6	1	07020	00	1	
			0,198	6	1	07020	00	2	
	• Striker	1A721, 1A731	0,200	6	1	07021	00	0	
	• 1 mm spacer for striker	1A721, 1A731	0,025	6	1	07021	01	0	
	• Backplate for lock and striker to be welded	1A721, 1A731	0,435	6	1	07021	05	0	
	• Zinc plated striker	50411, 50421,	0,092	6	1	07024	01	1	
		50461, 50471, 50481	0,092	6	1	07024	01	2	
	• Zinc plated striker	50511, 50521,	0,080	6	1	07024	02	1	
		50561, 50571, 50581	0,094	6	1	07024	02	2	
	• Coil set • 12V ac CE	1A610, 1A611, 1A630, 1A631, 1A721, 1A731	0,092	6	1	07025	00	0	
	• Zinc plated striker	55254, 55264, 55274, 55284	0,137	6	1	07037	01	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated steel protective box for outside cylinder		0,200	10	1 07056 00 0				
	• Zinc plated steel floor striker	11823	0,307	12	1 07058 00 0				
	• Protective back plate, striker spacer and zinc plated steel screws	11721, 11726,	0,645	20	1 07061 00 1				
		11731, 11736,	0,645	20	1 07061 00 2				
		11761, 11771,							
		11921, 11931							
	• Protective back plate with zinc plated steel screws	11823	0,525	20	1 07061 01 1				
			0,525	20	1 07061 01 2				
	• Protective back plate, striker spacer and zinc plated steel screws	50411, 50421,	0,635	20	1 07061 10 0				
		50471, 50481, 50511, 50521, 50571, 50581							
	• Zinc plated extended bolts • SUPPLIED AS STANDARD: - Pair of bolts diameter 8 mm. - Pair of tips diameter 10 mm. item 1.06291.05.0	17358, 46300, 46302, 46305, 46320, 46322, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,600	12	1 07088 03 0				
	• Zinc plated extended bolts • SUPPLIED AS STANDARD: - Pair of bolts diameter 8 mm. - Pair of tips diameter 14 mm. item 1.06291.07.0	17358, 46300, 46302, 46305, 46320, 46322, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378	0,575	12	1 07088 05 0				


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
 	- Coil set 12 V ac - Black nylon support	11521, 11540,	0,092	6	1	07118	00	1	
		11551, 11560,	0,092	6	1	07118	00	2	
		11610, 11611,							
		11630, 11631,							
		11660, 11661,							
		11670, 11671,							
		11721, 11731,							
		11761, 11771,							
		11823, 11921,							
		11931							
		11540, 11560,	0,075	6	1	07118	01	1	
		11610, 11611,	0,082	6	1	07118	01	2	
		11630, 11631,							
		11660, 11661,							
		11670, 11671							
 	- Adjustable coil set 12 V ac - Blue nylon support	11521, 11540,	0,075	6	1	07120	00	1	
		11551, 11560,	0,074	6	1	07120	00	2	
		11610, 11611,							
		11630, 11631,							
		11660, 11661,							
		11670, 11671,							
		11721, 11731,							
		11761, 11771,							
		11823, 11921,							
		11931							
		11540, 11560,	0,075	6	1	07120	01	1	
		11610, 11611,	0,075	6	1	07120	01	2	
		11630, 11631,							
		11660, 11661,							
		11670, 11671							
 	- Set of coils 12 V ac CE	17352, 17353,	0,035	6	1	07128	00	0	
		17357, 17358							
		17352, 17353,	0,035	6	1	07128	01	0	
		17357, 17358							



7




E = 50 - 60 - 70 - 80




E = 50 - 60 - 70 - 80




8




E = 50 - 60 - 70 - 80




9

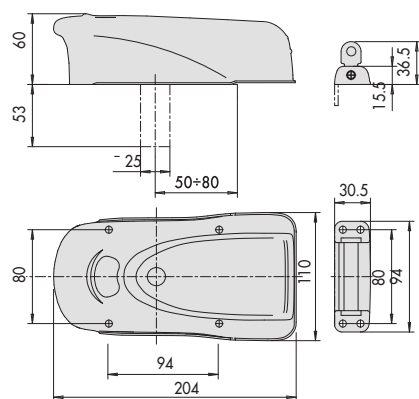

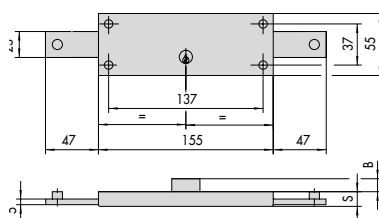1A610, 1A611, 1A630, 1A631, 1A721, 1A731




	S	B
1.41210.78	20	6,5
1.41320.78	17	9,5
1.41410.78	15	6
1.41510.78	15	5,5

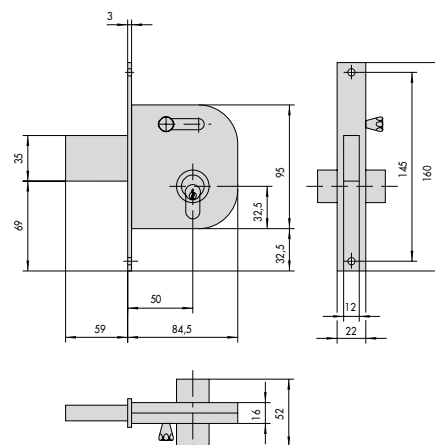


1.42030.50, 1.42031.50

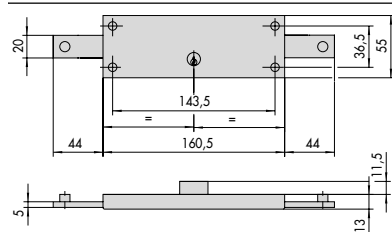10




1.41010.80

13




	S	B	A	C
1.41220.78	20	6,5		
1.41221.78	20	6,5		
1.41230.78	20	6,5		
1.41231.78	20	6,5		
1.41310.78	17	9,5		
1.41311.78	17	9,5		
1.41420.78	15	6		
1.41421.78	15	8,5		
1.41525.78	15	5,5	5	31
1.41526.78	15	5,5	5	31

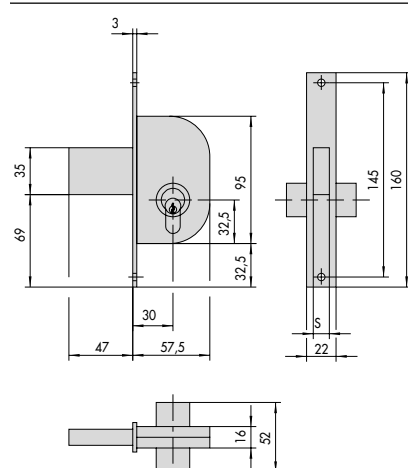16




1.42110.30, 1.42111.30
1.42120.30, 1.42121.30

11




1.41110.60, 1.41111.60

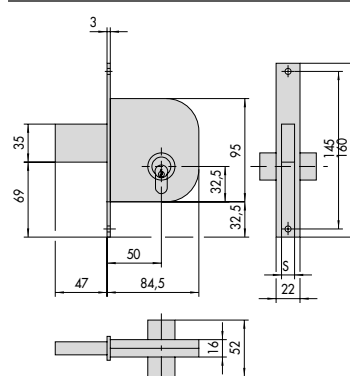14



1.42010.50, 1.42011.50
1.42020.50, 1.42021.50

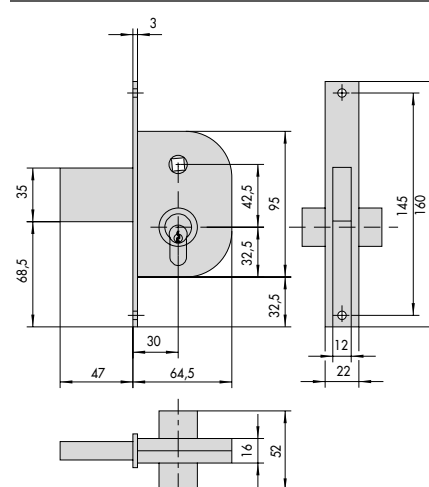17




1.42210.30, 1.42211.30


12

15

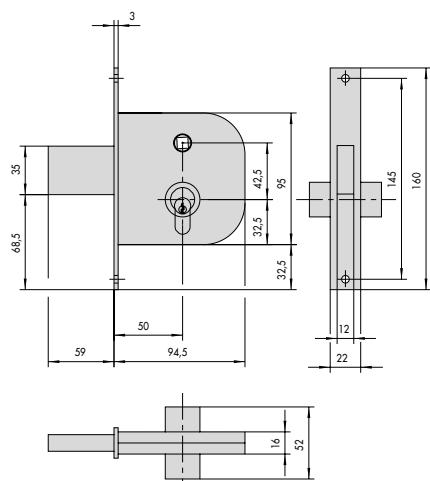
18



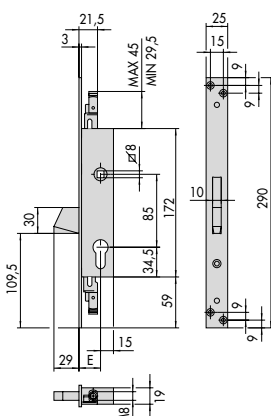1.42310.50, 1.42311.50



46300, 46302
E = 25 - 30 - 35

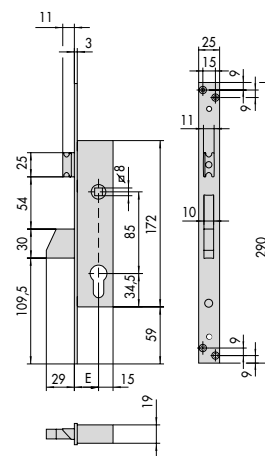


46315, 46317
E = 25 - 30 - 35


19

22

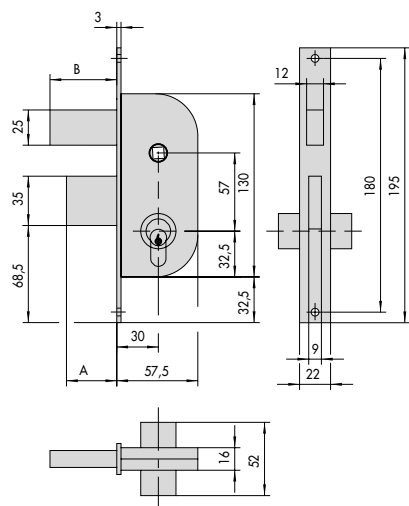
25



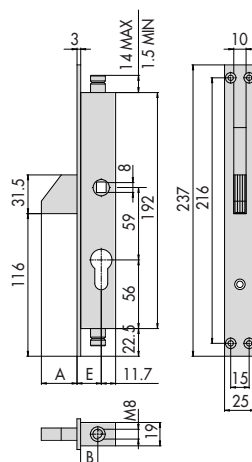1.42410.30, 1.42411.30
1.42420.30, 1.42421.30



	E	A	B
1.46305.19.0	19,7	29	14
1.46305.25.0	25,7	23	20
1.46305.30.0	31,7	22	26,5
1.46307.19.0	19,7	29	14
1.46307.25.0	25,7	23	20
1.46307.30.0	31,7	22	26,5

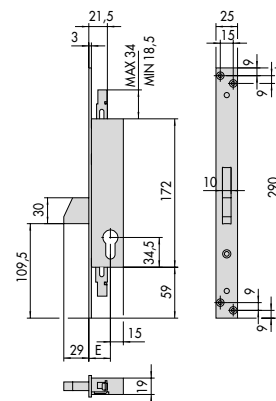


46320, 46322
E = 25 - 30 - 35


20

23

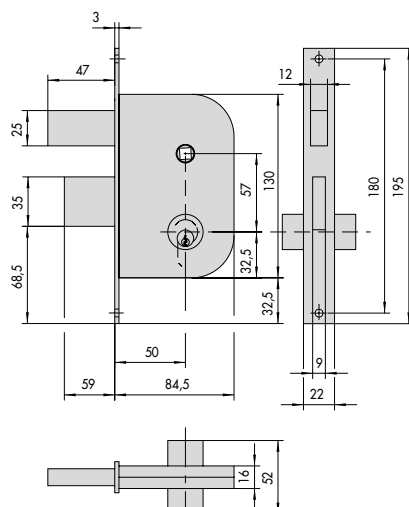
26



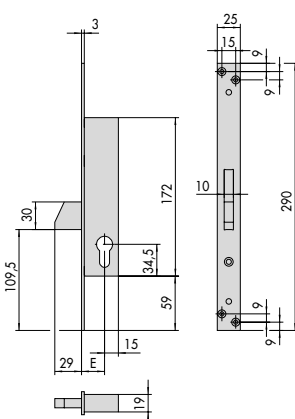1.42510.50, 1.42511.50



46310, 46312
E = 25 - 30 - 35

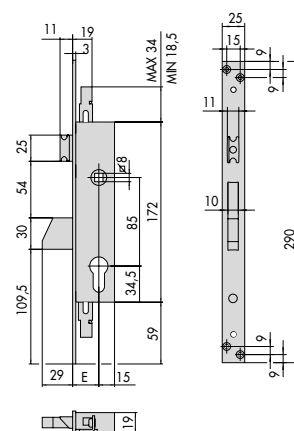


46325, 46327
E = 25 - 30 - 35

21


24

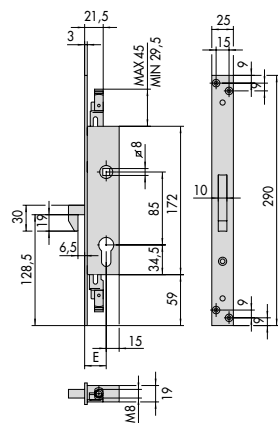27




46365

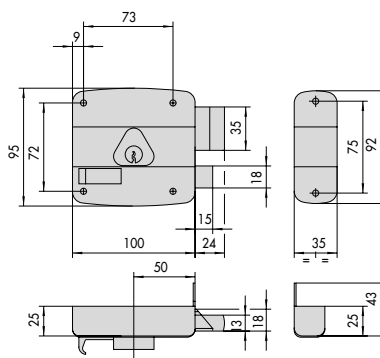E = 25 - 30 - 35




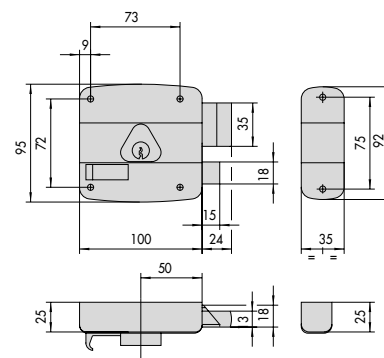1.50461.50



1.50561.50

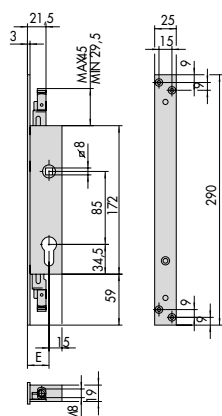
28



46375


E = 25 - 30 - 35

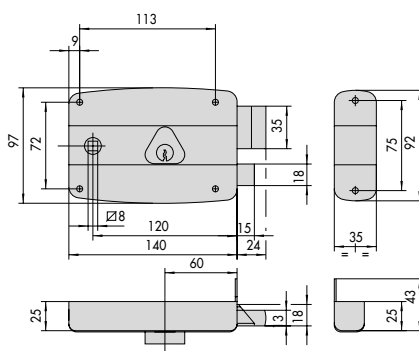31




1.50471.60, 1.50481.60

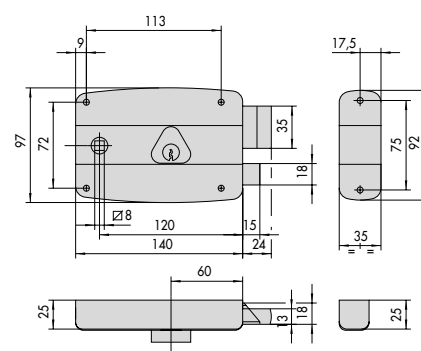34




1.50571.60, 1.50581.60

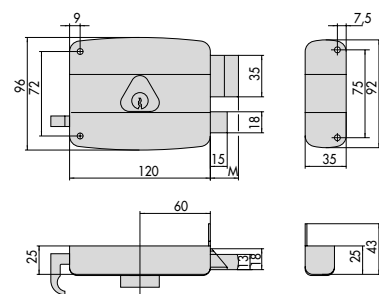29




1.50411.60, 1.50421.60

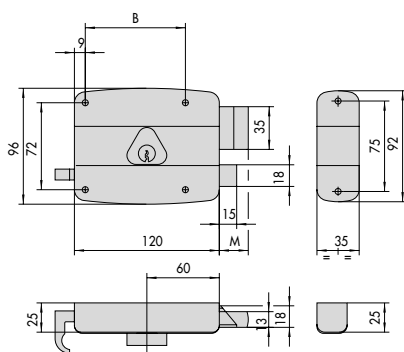32



1.50511.60, 1.50521.60

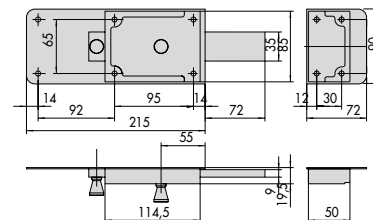35




1.55254.55, 1.55274.55


30

33

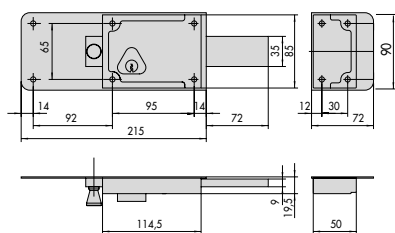
36



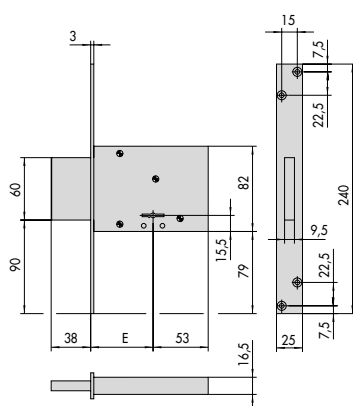1.55264.55, 1.55284.55



57013
E = 52 - 60 - 70

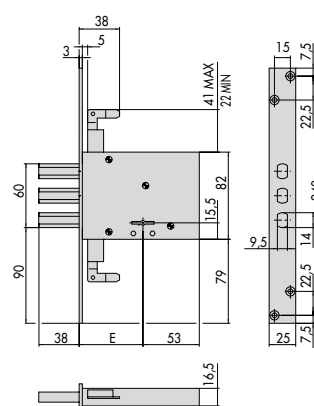


57035
E = 60 - 70


37

40

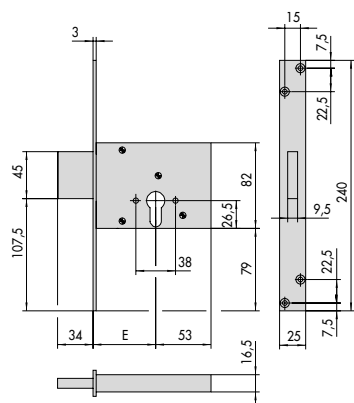
43



56013
E = 52 - 60 - 70

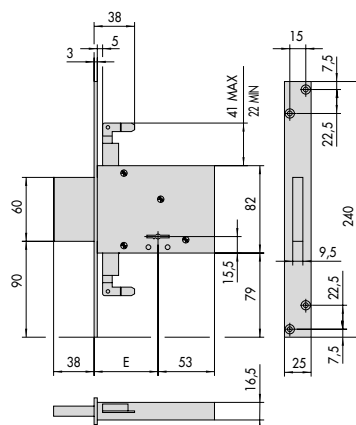

57016
E = 60 - 70

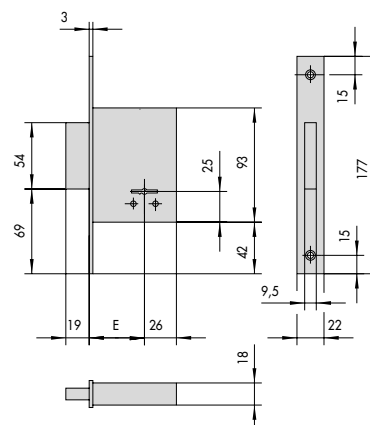


57223
E = 40 - 45 - 50 - 60


38

41

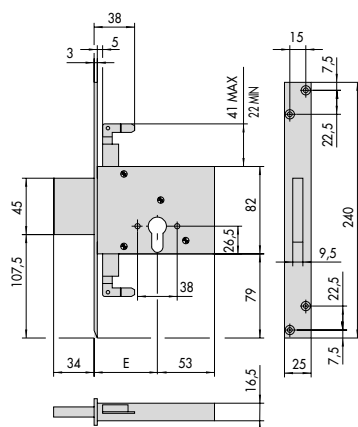
44



56016
E = 60 - 70

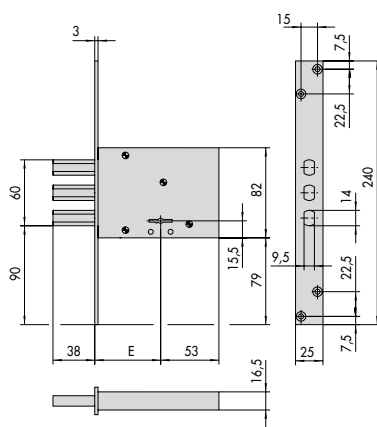

57030
E = 60 - 70

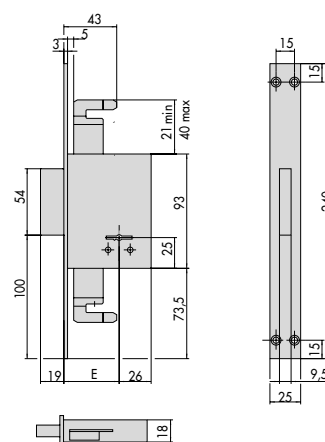


57226
E = 45 - 50 - 60

39

42

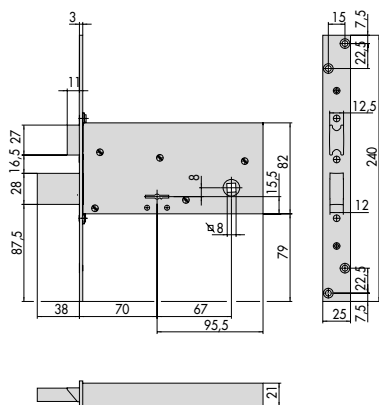45




57313

1.57336.70

46

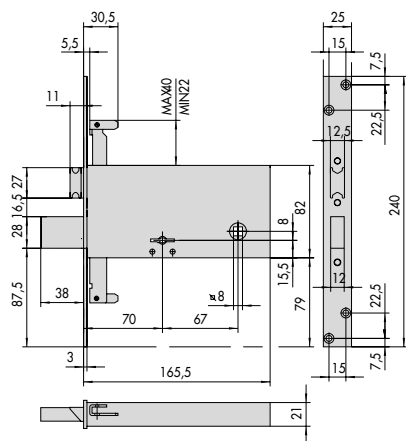49




57318


1.57353.90

47

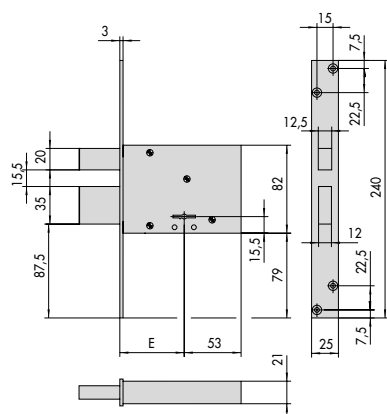50



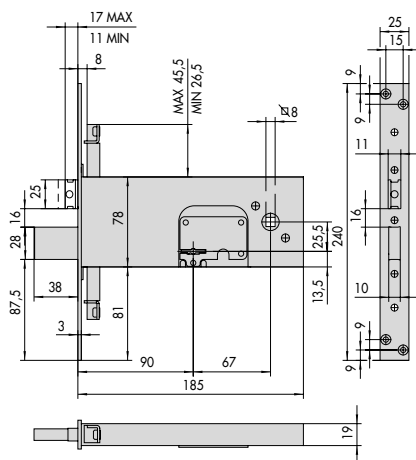1.57333.70



57358

48

51